


172 × 38mm



- ▶ 12V, 24V and 48V Models
- ▶ Polarity Protected
- ▶ Permanently Lubricated Ball Bearings
- ▶ Alarm/Tachometer/Thermal Speed Control/PWM Speed Control Options
- ▶ Built-in Interactive Control Available
- ▶ Die-Cast Metal Housing
- ▶ One-Piece, Black Thermoplastic Impeller Rated V-0
- ▶ Color-Coded 12-inch (305 mm) Leads or Spade-Pin Terminals




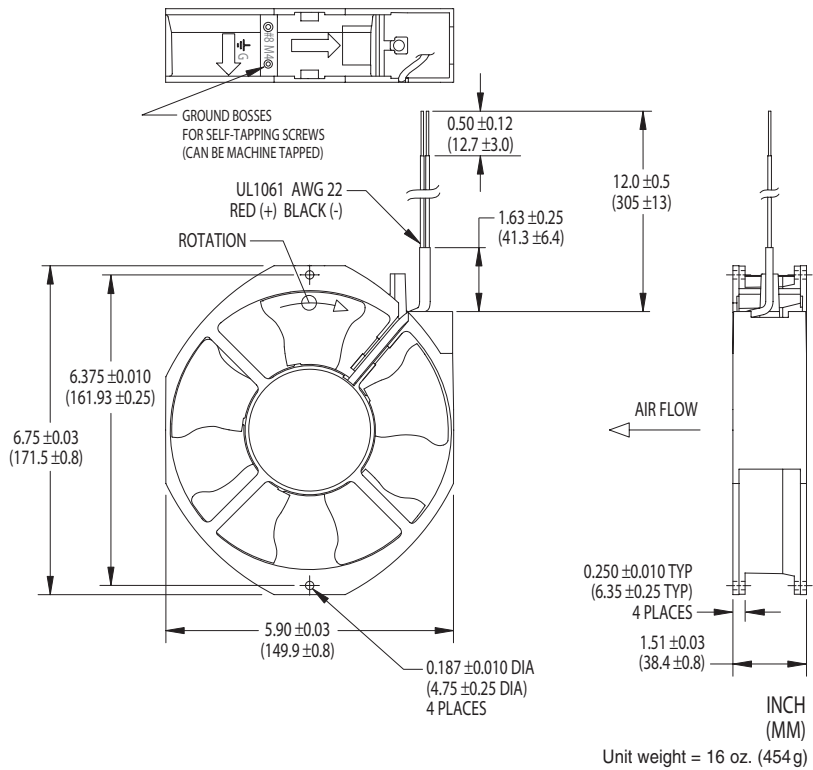


SLIMLINE TA600DC Series—Electrical and Mechanical Characteristics

Model	Operating Voltage			Current (A)	Power (W)	Sound Level			Fan Speed (rpm)	Bearing	Operating Temp.		L10 Life † (hours)
	Air Flow (CFM)	Nom. (V)	Range (V)			Pressure (dBA)	NPEL (Bels)	Min. (°C)			Max. (°C)		
A33875	235	12	6.0-14	1.70	20.4	56.5	6.8	2,950	Ball	-10	+70	58,900	
A34255	235	24	12-28	0.80	19.2	56.5	6.8	2,950	Ball	-10	+70	58,900	
A34265	235	48	24-56	0.39	18.7	56.5	6.8	2,950	Ball	-10	+70	58,900	

Note: Air flow, current, power, speed and sound level ratings are at nominal voltage against zero static pressure. NPEL = Noise Power Emission Level. Power termination, control and signal options are designated by two-digit suffixes added to the model names: For color-coded 12-inch power leads with stripped ends, add "-16" to the model numbers. For spade-pin power terminals 0.110 inches wide and 0.020 inches thick, add suffix "-10" to the model number.

† L10 bearing life expectancy at $T_A = +40^\circ\text{C}$, nominal voltage. Failure criteria include a 15% reduction in speed or a 5 dBA increase in sound pressure.

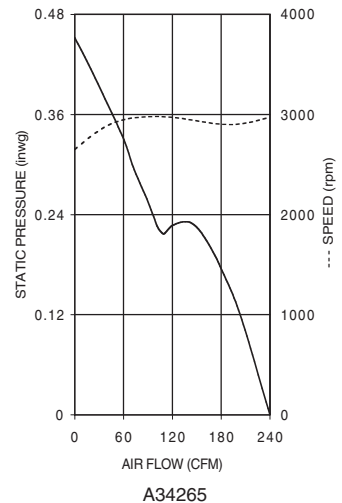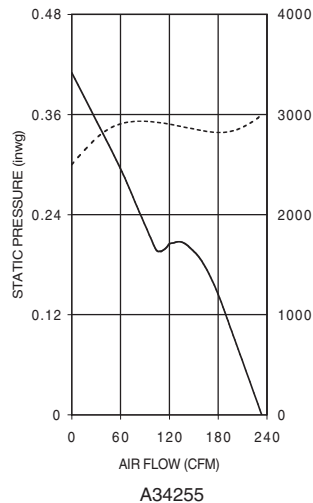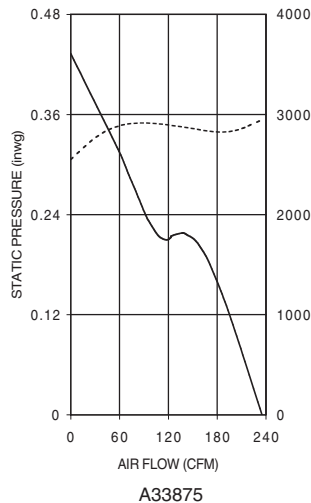

Nidec
Nidec America Corporation

phone 781-848-0970 · fax 781-380-3634 · email fans@nidec.com · www.nidec.com