



# 51 × 15mm

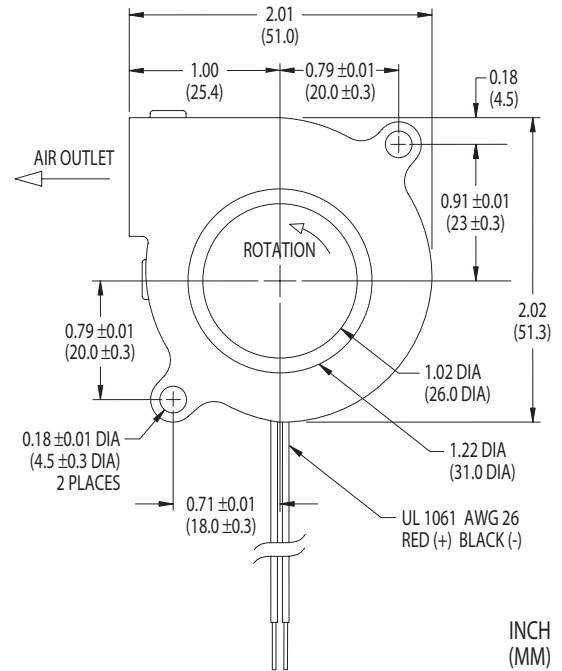

- ▶ 2 to 4 CFM Air Flow Ratings
- ▶ Permanently Lubricated Ball Bearings or Long-Life NBR<sup>Δ</sup> Designs
- ▶ Alarm/Tachometer/Thermal Speed Control Options Available
- ▶ Sound-Absorbing Thermoplastic Frame and Impeller Rated V-0
- ▶ Color-Coded 11.8 in. (300 mm) Leads

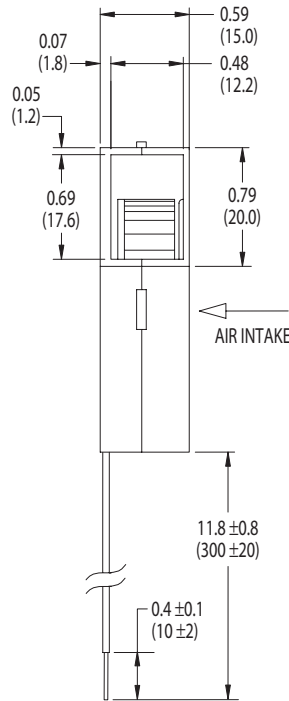


Unit weight = 1 oz. (28 g)

## GAMMA 26 Series—Electrical and Mechanical Characteristics

| Model  | Air Flow (CFM) | Operating Voltage |           | Current (mA) | Power (W) | Sound Level    |             | Fan Speed (rpm) | Bearing <sup>Δ</sup> | Operating Temp. |           |
|--------|----------------|-------------------|-----------|--------------|-----------|----------------|-------------|-----------------|----------------------|-----------------|-----------|
|        |                | Nom. (V)          | Range (V) |              |           | Pressure (dBA) | NPEL (Bels) |                 |                      | Min. (°C)       | Max. (°C) |
| A33997 | 2.0            | 12                | 10.2-13.8 | 90           | 1.08      | 26.5           | 4.1         | 3,700           | Ball                 | -10             | +70       |
| A34860 | 2.0            | 12                | 10.2-13.8 | 70           | 0.84      | 24.6           | 4.0         | 3,700           | NBR                  | -10             | +70       |
| A34141 | 2.0            | 24                | 20.4-27.6 | 60           | 1.44      | 26.5           | 4.1         | 3,700           | Ball                 | -10             | +70       |
| A35038 | 2.0            | 24                | 20.4-27.6 | 70           | 1.68      | 24.6           | 4.0         | 3,700           | NBR                  | -10             | +70       |
| A33998 | 3.0            | 12                | 10.2-13.8 | 140          | 1.68      | 36.0           | 4.7         | 4,700           | Ball                 | -10             | +70       |
| A35037 | 3.0            | 12                | 10.2-13.8 | 100          | 1.20      | 33.6           | 4.6         | 4,700           | NBR                  | -10             | +70       |
| A34142 | 3.0            | 24                | 20.4-27.6 | 80           | 1.92      | 36.0           | 4.7         | 4,700           | Ball                 | -10             | +70       |
| A35039 | 3.0            | 24                | 20.4-27.6 | 90           | 2.16      | 33.6           | 4.6         | 4,700           | NBR                  | -10             | +70       |
| A33999 | 4.0            | 12                | 10.2-13.8 | 170          | 2.04      | 39.3           | 5.1         | 5,700           | Ball                 | -10             | +70       |
| A34861 | 4.0            | 12                | 10.2-13.8 | 160          | 1.92      | 41.8           | 5.3         | 5,700           | NBR                  | -10             | +70       |
| A34143 | 4.0            | 24                | 20.4-27.6 | 120          | 2.88      | 39.3           | 5.1         | 5,700           | Ball                 | -10             | +70       |
| A35040 | 4.0            | 24                | 20.4-27.6 | 110          | 2.64      | 41.8           | 5.3         | 5,700           | NBR                  | -10             | +70       |

Note: Air flow, current, power, speed and sound level ratings are at nominal voltage against zero static pressure. NPEL = Noise Power Emission Level. Power termination and signal options are designated by two-digit suffixes added to the model names: For color-coded 300 mm power leads with stripped ends, add "-16" to the model numbers.

<sup>Δ</sup> NBR, Nidec Bearing Revolution: See <http://www.nidec.com/nbr/nbr.htm>.



**Nidec**  
Nidec America Corporation

phone 781-848-0970 · fax 781-380-3634 · email [fans@nidec.com](mailto:fans@nidec.com) · [www.nidec.com](http://www.nidec.com)

# 51x15mm

## GAMMA 26 Air Performance Characteristics

