


QUICK GUIDE

AC Fans

Model	Air		Line		Power (W)	NPEL (Bels)	Housing	Strut Side	Safety Approval			Temperature		Weight	
	Flow (CFM)	Voltage (V)	Frequency (Hz)	Current (mA)					UL	CSA	VDE	Min. (°C)	Max. (°C)	(oz)	(g)
TA300AC Sleeve Bearing Fans															
3.14 x 3.14 x 1.50 in. (80 x 80 x 38 mm)															
A32075	15	115	50/60	55/52	7.0/6.0	3.4	Zinc	Inlet	√	√	√	-20	+60	13.7	390
A32354	20	115	50/60	62/58	6.0/6.0	3.5	Zinc	Discharge	√	√	√	-20	+60	13.7	390
A30716	21	115	50/60	62/58	5.5/5.0	4.4	Zinc	Inlet	√	√	√	-20	+60	13.7	390
A31022	30	115	50/60	140/122	13/11	4.8	Zinc	Inlet	√	√	√	-20	+60	13.7	390
A31137	30	230	50/60	70/61	13/11	4.8	Zinc	Inlet	√	√	√	-20	+60	13.7	390
A32250	32	115	50/60	120/104	12/11	4.9	Zinc	Discharge	√	√	√	-20	+60	13.7	390
A30473	32	115	50/60	120/104	10.5/9.0	5.1	Zinc	Inlet	√	√	√	-20	+60	13.7	390
A32353	32	230	50/60	60/52	11/10	4.9	Zinc	Discharge	√	√	√	-20	+60	13.7	390
A30475	32	230	50/60	60/52	10.5/9.0	5.1	Zinc	Inlet	√	√	√	-20	+60	13.7	390


TA300AC Ball Bearing Fans															
3.14 x 3.14 x 1.50 in. (80 x 80 x 38 mm)															
A30477	32	115	50/60	120/104	10.5/9.0	5.1	Zinc	Inlet	√	√	√	-20	+70	13.7	390
A30479	32	230	50/60	60/52	10.5/9.0	5.1	Zinc	Inlet	√	√	√	-20	+70	13.7	390

Note: Noise Power Emission Level (NPEL), current and power ratings are at nominal voltage against zero static pressure. For terminal and lead options, see the How to Order section of this catalog.
 † TUV approved to EN60950.

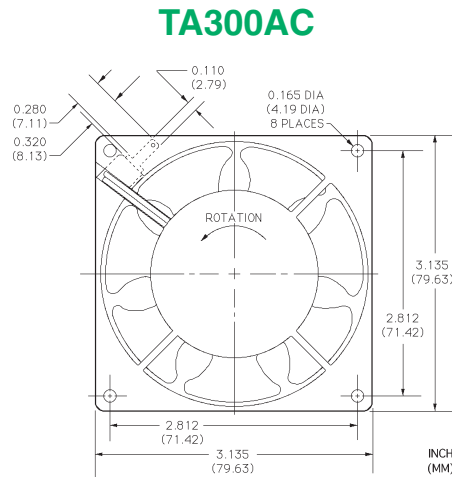


WIDTH = 1.50 IN. (38 MM)


TA300 ALPHA V SLEEVE BEARING FANS

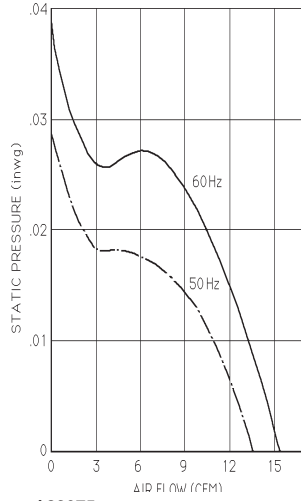


A32075

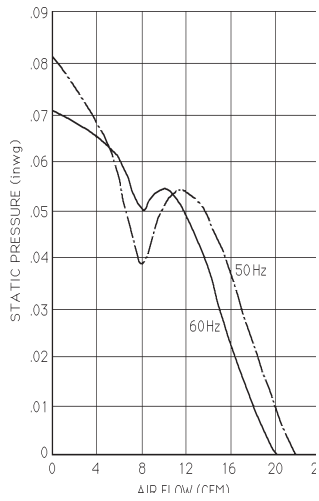


A32354

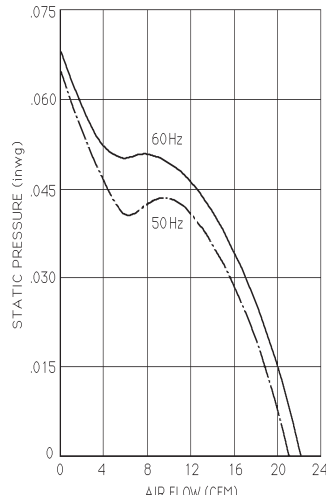


A30716

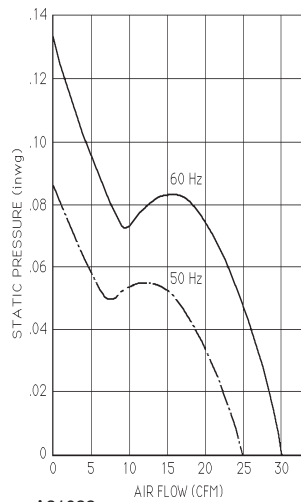


A31022

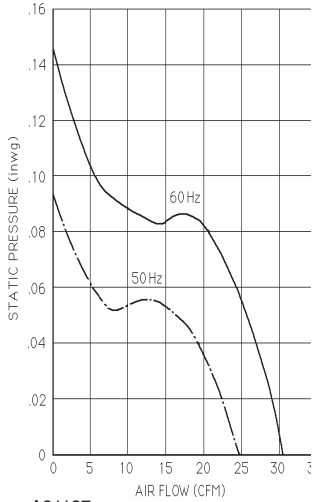


A31137

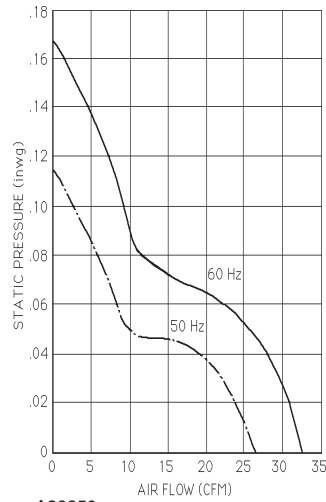


A32250

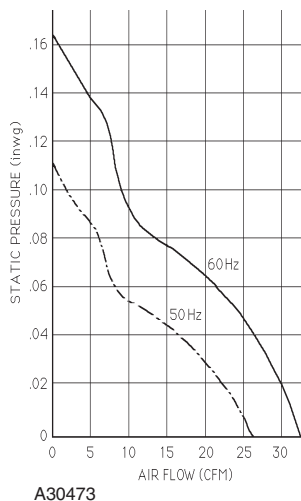

A30473

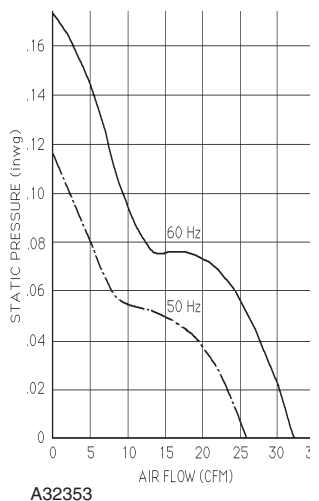


A32353

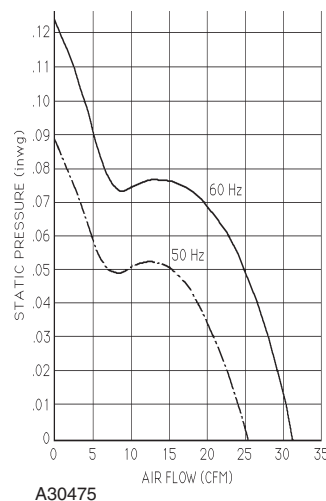


A30475

TA300 ALPHA V BALL BEARING FANS

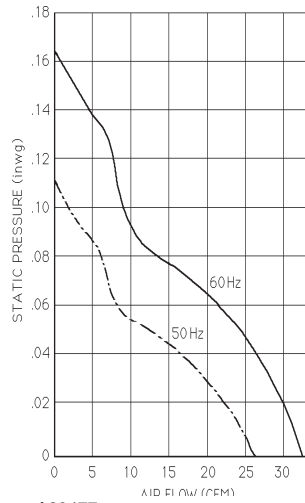

A30477

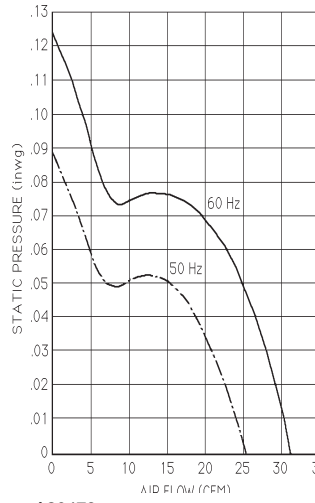

A30479