


仕様一覧表 / Specification table **LS8、LS12 Series Φ 8、 Φ 12 Coreless Motor**


型式 / MODEL		LS8-001	LS12-003(1)	LS12-003(2)	LS12-004
モータ外径 / Motor outer diameter	(mm)	8.4	12	12	12
モータ全長 / Motor length	(mm)	14.8	20	20	16
定格電圧 / Rated voltage	(V)	6	7	7.4	8
無負荷回転数 / No-load speed	(min ⁻¹)	24000	14700	28300	15250
無負荷電流 / No-load current	(mA)	40	65	100	60
起動トルク / Stall torque	(mN·m)	1.9	7.4	13.23	5.1
起動電流 / Stall current	(mA)	890	1750	5560	1125
イナーシャ / Inertia	(g·cm ²)	0.04	0.22	0.22	0.24
重量 / Weight	(g)	4(Approx)	10(Approx)	10(Approx)	8(Approx)

代表特性 / Typical performance

LS8-001

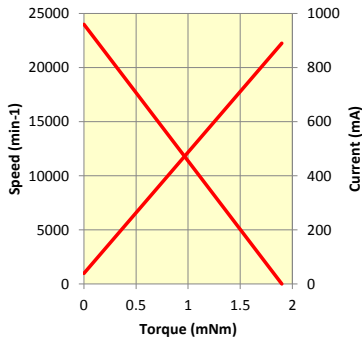


LS12-004

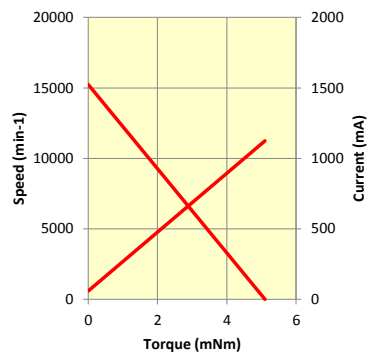


概略寸法図 / Schematic drawing

LS8-001

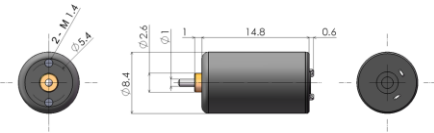


LS12-004

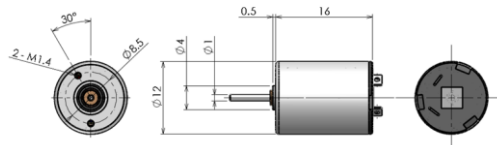


代表特性 / Typical performance

LS12-003(1)

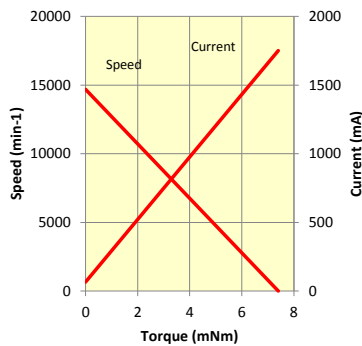


LS12-003(2)

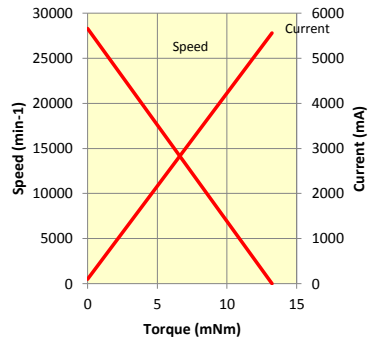

概略寸法図 / Schematic drawing

LS12-003(1)

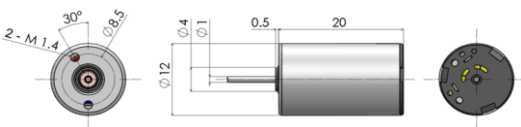

LS12-003(2)

