

## PM type Stepping Motors MSDN series

### MSDN serie



### Standard specifications

Size (mm)	Φ10.2 × L10	
Weight (g)	5.0	
Resistance (Ω)	14	
Rated voltage (V)	6.5	
Driving waveform	Rectangle	
Excitation	2 phase	
Step angle (°)	18.0	
Step accuracy (%)	25	
Holding torque (mN·m)	1.18	
Detent torque (mN·m)	0.200	
Max self start frequency (pps)	1100	
Power supply type	FPC	○
	Lead wire	
	Pin connector	
Operating temperature (°C)	-10~70	



### Applications

Information equipment

### Characteristics

REACH and RoHS compliant

### Dimensions / Torque characteristic

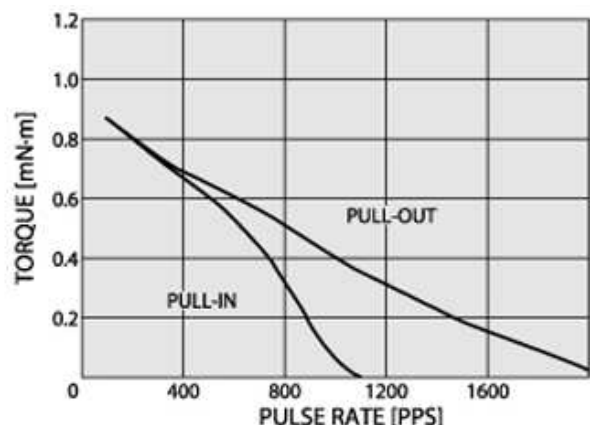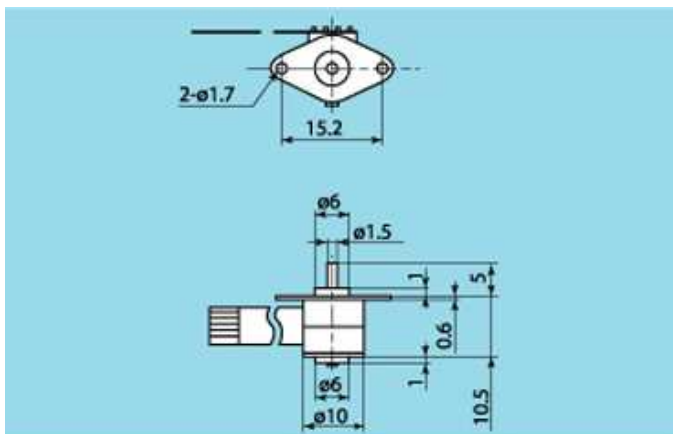

Characteristic data is based on standard specifications

## NIDEC SANKYO CORPORATION

For additional information, please contact our sales.

### Tokyo Office

Nidec Tokyo Bldg., 1-20-13 Osaki, Shinagawa-ku, Tokyo 141-0032, Japan Tel:(81)3-5740-3000