

PM type Stepping Motors MSHN series

■ MSHN series



■ Standard specifications

Size (mm)	Φ12 × L9.5
weight (g)	20
Resistance (Ω)	30
Rated voltage (V)	3.8
Excitation	Micro step
Driving waveform	bi-polar
Step angle (deg)	11.25
Holding torque (mN·m)	0.9
Max self start frequency (pps)	1000
Operating temperature (°C)	-40~85


■ Applications

For in-vehicle use

■ Characteristics

- The motor is optimized for the car cockpit. It has high torque, small size, and silence.
- Motor customization is possible according to the special requirement.

■ Dimensions / Torque characteristic

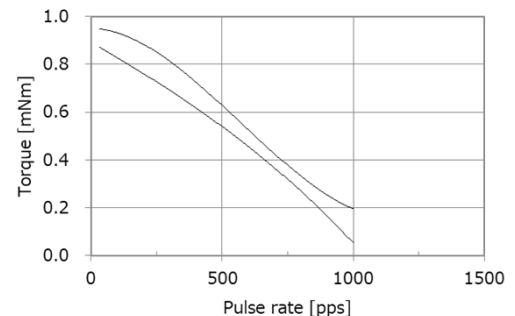

Characteristic data is based on standard specifications

NIDEC SANKYO CORPORATION

For additional information, please contact our sales.

Tokyo Office

Nidec Tokyo Bldg., 1-20-13 Osaki, Shinagawa-ku, Tokyo 141-0032, Japan Tel:(81)3-5740-3000