

PM type Stepping Motors MSKR series

■ MSKR series



■ Applications

Camera instrument



■ Characteristic

REACH and RoHS compliant

■ Standard specifications

Size (mm)	Φ6 × L5.7	
Weight (g)	0.9	
Resistance (Ω)	40	
Rated voltage (V)	5.0	
Driving waveform	Rectangle	
Excitation	2 phase	
Step angle (°)	18.0	
Step accuracy (%)	30	
Holding torque (mN·m)	0.17	
Detent torque (mN·m)	0.004	
Max self start frequency (pps)	2600	
Power supply type	FPC	○
	Lead wire	
	Pin connector	
Operating temperature (°C)	-10~70	

■ Dimensions / Torque characteristic

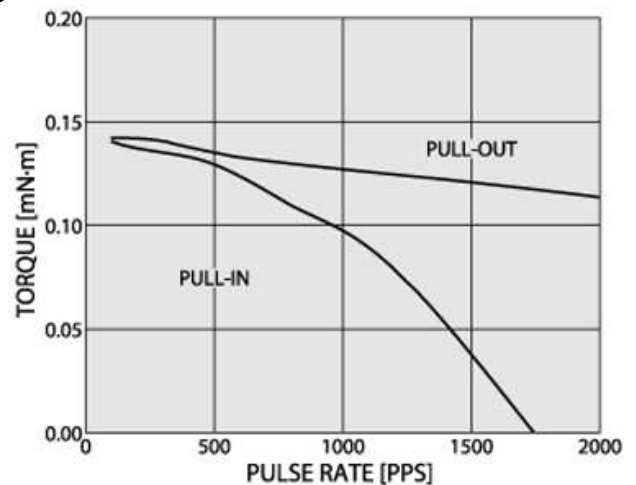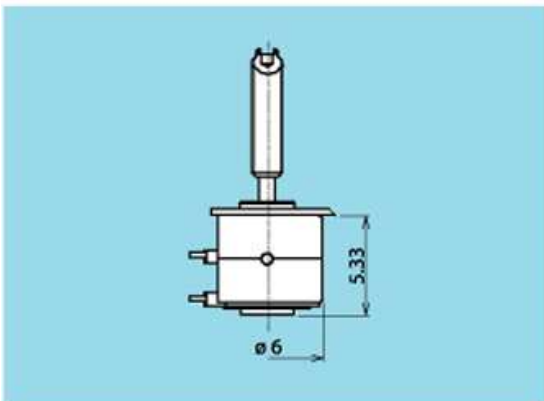

Characteristic data is based on standard specifications

NIDEC SANKYO CORPORATION

For additional information, please contact our sales.

Tokyo Office

Nidec Tokyo Bldg., 1-20-13 Osaki, Shinagawa-ku, Tokyo 141-0032, Japan Tel:(81)3-5740-3000