


Motor Drive Units Mechanical Units NTCY

■ NTCY

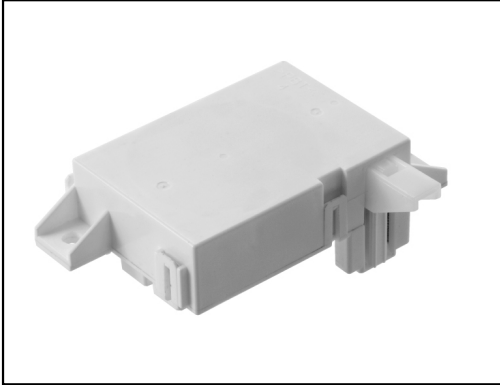

■ Applications

Lid lock unit for full automatic washing machines.

■ Features

- AC driving supply (AC100V, AC220~240V, 50/60Hz)
- AC inductor motor
- Lid lock by Slider

■ Specifications

Motor drive parts	Rated voltage	AC100V(50/60Hz) AC220~204V(50/60Hz)
	Voltage range	AC85~115V(50/60Hz) AC187~253V(50/60Hz)
	Current input	8.0±2mA(AC100V/50Hz) 6.8±2mA(AC100V/60Hz) 4.8±1mA(AC220V/50Hz)
Output parts	Lock type	Slider type
	Operating stroke	15mm
	Operating time	1s
Operating temperature		-5~60°C

NIDEC SANKYO CORPORATION

For additional information, please contact our sales.

Tokyo Office

Nidec Tokyo Bldg., 1-20-13 Osaki, Shinagawa-ku, Tokyo 141-0032, Japan Tel:(81)3-5740-3000