



Elevator Control

K-1200

K-1200 Home Hydraulic Control

Features

- Isolated design of core board and I/O function board increases flexibility
- Core board uses 32-bit ARM processor with Cortex M3
- Integrated LED digital display with five buttons on the processor board
- Optional LCD user interface
- Supports simplex and duplex selective collection operation
- Supports both serial and parallel control systems with the same hardware
- Supports GMV, BUCHER and various hydraulic pumps

Applications

- Up to 6 stops for parallel control (to 8 stops for serial control)
- Speed up to 1.0m/s
- Supports both manual and automatic door home hydraulic lift
- Simplex and duplex selective collective operation

Specifications

Input/Output Signals


Name	Input Signal	Output Signal
Specification	DC 24V	Relay Output
Quantity	26 point	16 point

System Configuration

Model	K-1200
Name	Home hydraulic control

Power Supply

Name	Voltage	Input Current	Power Consumption
Figure	DC 24V	≤200mA	≤1W

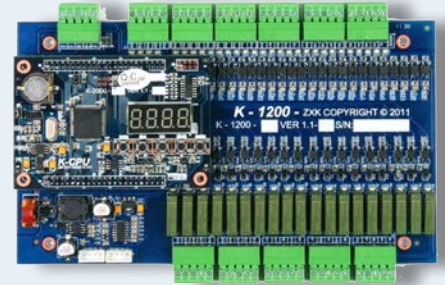

K-1200 Home Hydraulic Control Board

Zhongxiu Kinetek Elevator Technology Co., Ltd. (ZXK)

27 Zhen Ze Road, Bin Hu District,
Wuxi, 214121 Jiangsu, P.R. China

direct: +86 510 85166181

fax: +86 510 85166186

hotline: 800 828 7821

email: info@zxkinc.com

www.zxkinc.com

控制柜简介

K-1200



K-1200家用液压电梯控制器

产品特点

- 核心板和I/O功能板的模块化分离设计，使系统定制更加灵活
- 核心板采用工业级标准的Cortex M3 内核的32位ARM处理器
- 核心板集成简单实用的LED数码管显示，5位操作按钮
- 可选配的LCD人机界面
- 单台电梯集选，两台并联
- 同一硬件平台兼容串行和并行的系统控制
- 集成GMV, BUCHER多种液压泵站控制

适用范围

- 适用楼层：并行控制最大4层；串行控制最大8层
- 最大梯速：1.0米/秒
- 适用于家用手拉门和自动门液压电梯
- 单台电梯集选，两台并联

性能参数

输入/输出信号


名称	输入信号	输出信号
规格	DC 24V共阳，低电平输入有效	继电器常开触点输出
数量	26点	16点

系统配置

型号	K-1200
名称	家用液压电梯控制器

供电电源

名称	电源	输入电流	系统功耗
数值	DC 24V	≤200mA	≤1W

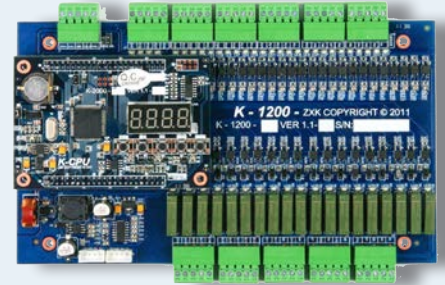

K-1200 家用液压电梯主控制器

中秀康迪克电梯技术有限公司
地址：无锡市滨湖区震泽路27号
邮编：214121

电话：86 510 85166181
传真：86 510 85166186
服务热线：800 828 7821

email: sales@zxkinc.com
www.zxkinc.com